

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
26 February 2004 (26.02.2004)


PCT

(10) International Publication Number
WO 2004/016419 A2

- (51) International Patent Classification⁷: **B32B**
- (21) International Application Number:
PCT/US2003/026058
- (22) International Filing Date: 19 August 2003 (19.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/404,573 19 August 2002 (19.08.2002) US
- (71) Applicants (for all designated States except US): **RO-BROY INDUSTRIES, INC.** [US/US]; River Road, Verona, PA 15147 (US). **DODDS, John, Joseph** [US/US]; 354 McGough Way, Trafford, PA 15085 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HSU, Tim** [US/US]; 1345 Megan Drive, State College, PA 16803 (US).
- (74) Agents: **ORKIN, Russell, D. et al.**; Webb Ziesenheim Logsdon Orkin & Hanson, P.C., 700 Koppers Building, 436 Seventh Avenue, Pittsburgh, PA 15219-1818 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: HIGH TEMPERATURE LINER

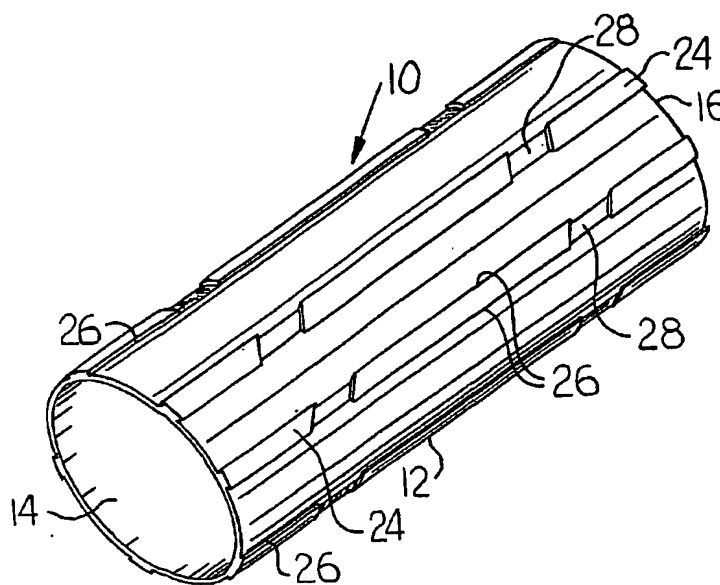

(57) Abstract: The present invention is directed to an extrudable resin composition and a method of extruding the extrudable resin composition, comprising a high temperature engineering thermoplastic, one or more reinforcement components, an enhancing filler component, a polymeric lubricant, and an external lubricant, wherein the extrudable resin composition is capable of withstanding temperatures up to about 427 °C. The invention is further directed to the use of the extruded pipes and/or lined pipes, produced according to the present method, in downhole tubular applications in oil and gas production; in line pipe, flow line, and transportation line applications in oil and gas production and supply operations; or in most any application where corrosive protection is required to transmit or store corrosive fluids, particularly at high temperatures.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.